



Applications

- ~ Single non-concussive self-closing basin push button tap
- ~ Deck mounted
- ~ For use with Resan™ Oval basin

Water Saving


- ~ Automatic shut off

Features

- ~ Supplied with hot and cold indices with water flow aerator
- ~ Cartridge PRO-167/C+H/VALVE-C/P
- ~ 1/2" x 50mm threaded tail connections
- ~ Deck mount drill hole diameter 22mm
- ~ Anti-vandal anti-swivel lug feature
- ~ Minimum operating pressure 0.2 bar LP.



Dimensional Data

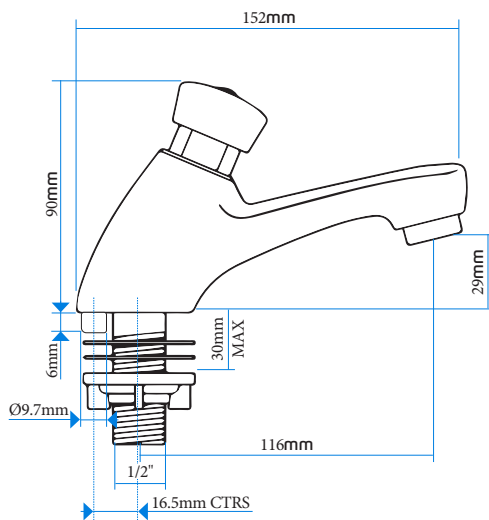

Technical Data

Finish	Chrome
Flow Regulator	FR-100/5-PLA
Minimum Operating Pressure	0.2 bar LP
Flow Rate at 3.0 Bar Flow Pressure	15 l/min